




## Pseudo-SMD

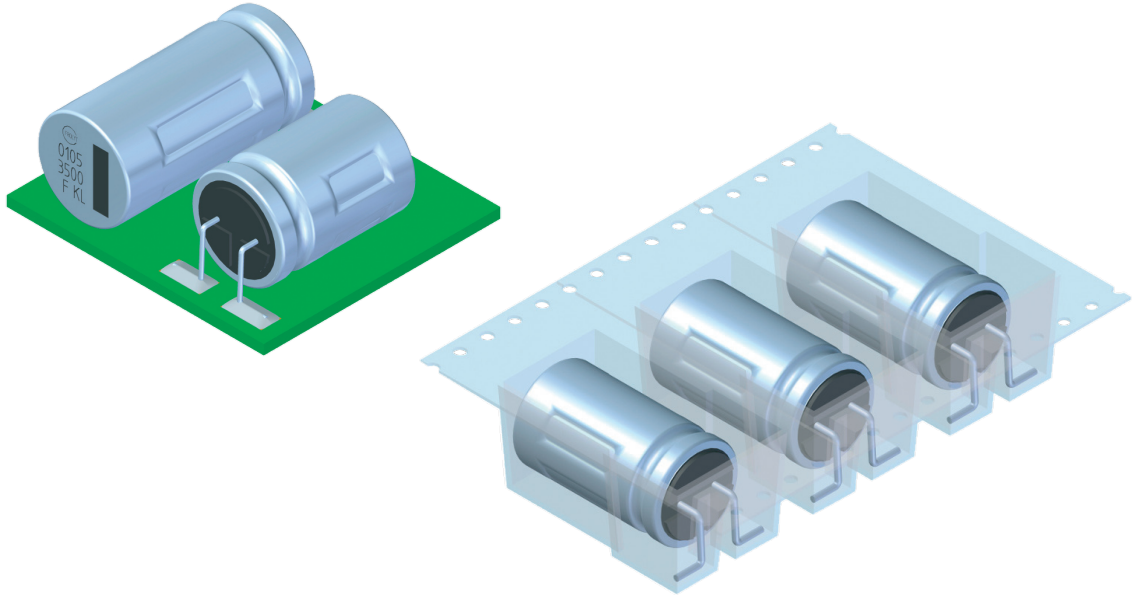

- Capacitor for surface mounting utilizing lead-free reflow soldering and meeting the highest requirements
- thermo fixing during the soldering process for high endurance against stress of vibration (30g, three planes, fast temperature change)
- high capacitance/voltage combinations within the voltage range from 6.3 V to 450 V
- temperature range - 55 °C to + 125 °C (150 °C)
- delivered in blister tapes on reel
- if required with sheath insulation  $\varnothing$  8.7...18.0 mm
- customized characteristics for specific end-use possible
- Registered at the German Patent and Trademark Office

### - nominal dimensions:

$\varnothing$ 8,7x12,7mm,	$\varnothing$ 10,0x12,7mm,	$\varnothing$ 10,0x16,5mm,	$\varnothing$ 10,0x21,0 mm,
$\varnothing$ 12,5x21,0 mm,	$\varnothing$ 12,5x25,0 mm,	$\varnothing$ 12,5x30,0 mm,	$\varnothing$ 16,5x22,0 mm,
$\varnothing$ 16,5x26,0 mm,	$\varnothing$ 16,5x30,0 mm,	$\varnothing$ 16,5x36,0 mm,	$\varnothing$ 18,0x21,0 mm,
$\varnothing$ 18,0x26,0 mm,	$\varnothing$ 18,0x30,0 mm,	$\varnothing$ 18,0x36,5 mm	